

These installation instructions show an example installation on a 2019 GM 1500 new style truck. The installation may vary for your vehicle, so it may be necessary to consult a GM service manual for specific instructions for your year model.

In-Line Speedometer Calibrator Module Software Setup Instructions

1. UPDATE




This step makes sure that the In-Line Speedometer Calibrator Module has the latest firmware installed. If the Tuner Update Software is not already installed on your PC, go to our website (hypertech.com) and download the Tuner Update Software. Connect the In-Line Speedometer Calibrator Module to your PC with the supplied USB cable, run the update software and click the Update Tuner button.

2. CONFIGURE

For accurate readings, measure the stock and new tire height from the ground to the top of the tire. Enter these measurements (in inches) into the configuration software, and click program to commit these settings. Once configuration is complete, take the In-Line Speedometer Calibrator Module and harness to the vehicle.

3. CONNECT

Securely connect the In-Line Speedometer Calibrator Module to the In-Line Speedometer Calibrator harness.

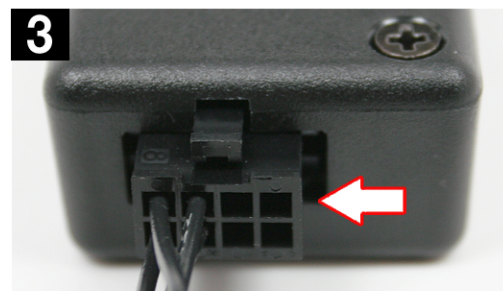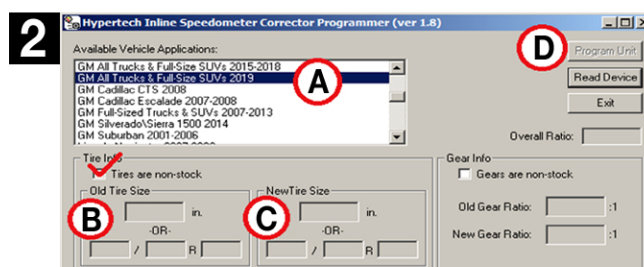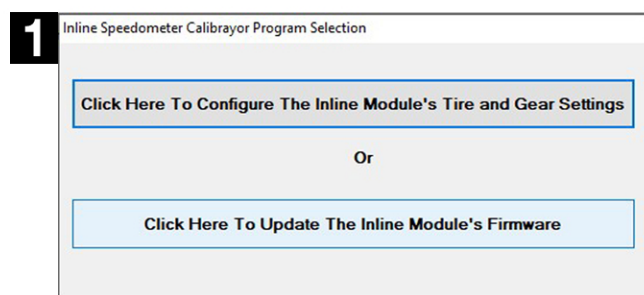

In-Line Speedometer Calibrator Module Vehicle Installation Instructions


1. **POWER OFF** the vehicle for ten (10) minutes with the ignition key out of proximity of the vehicle to ensure the HSCAN bus powers down completely.




2. Looking up under the driver's side dash, near the brake pedal, you will see a module with seven (7) color coded connectors. Remove the 1st White connector closest to you.




3. Plug the female end of the In-Line Speedometer Calibrator Module harness into the white plug of the Body Control Module (BCM). Ensure the connector is fully seated and locked into place.

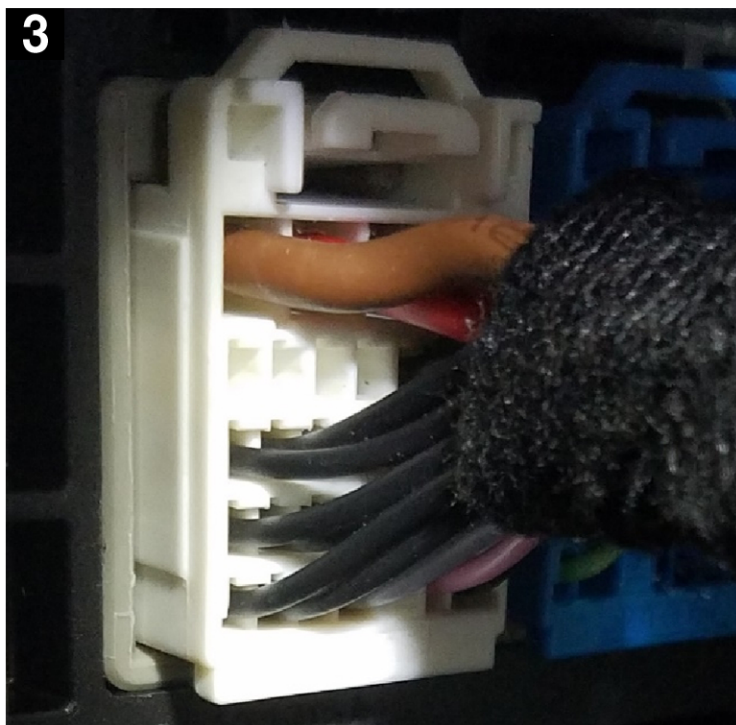

4. Plug the male end of the In-Line Speedometer Calibrator Module harness into the factory harness which was unplugged from the BCM. Ensure the connector is fully seated and locked into place.

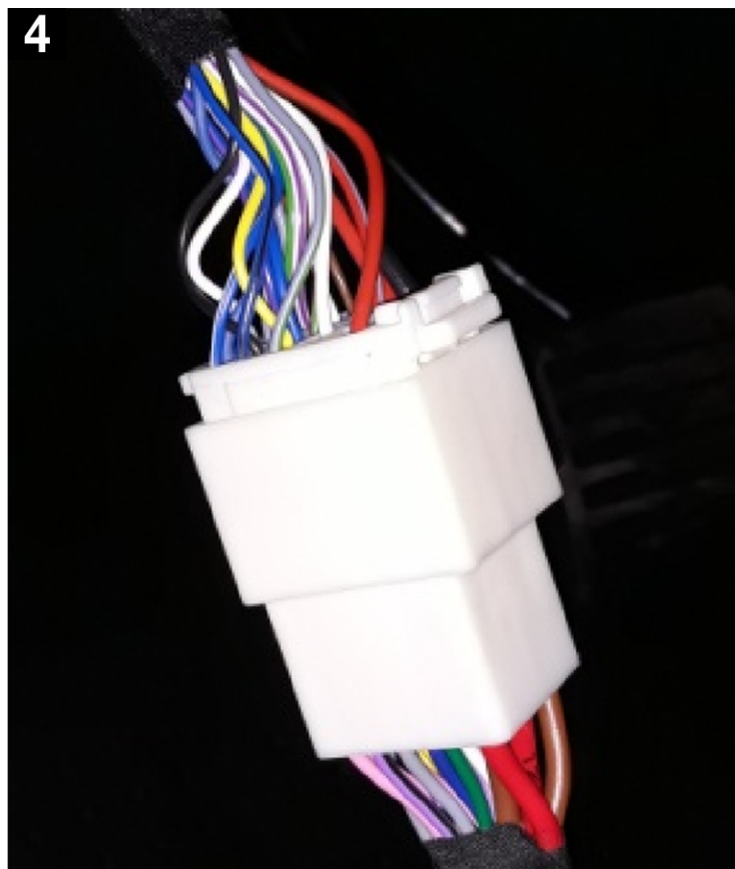

5. Install the In-Line Speedometer Calibrator Module under the driver's side dash, near the brake pedal. Secure the In-Line Speedometer Calibrator Module in place and tuck it up out of the way of movement in the foot well as shown.

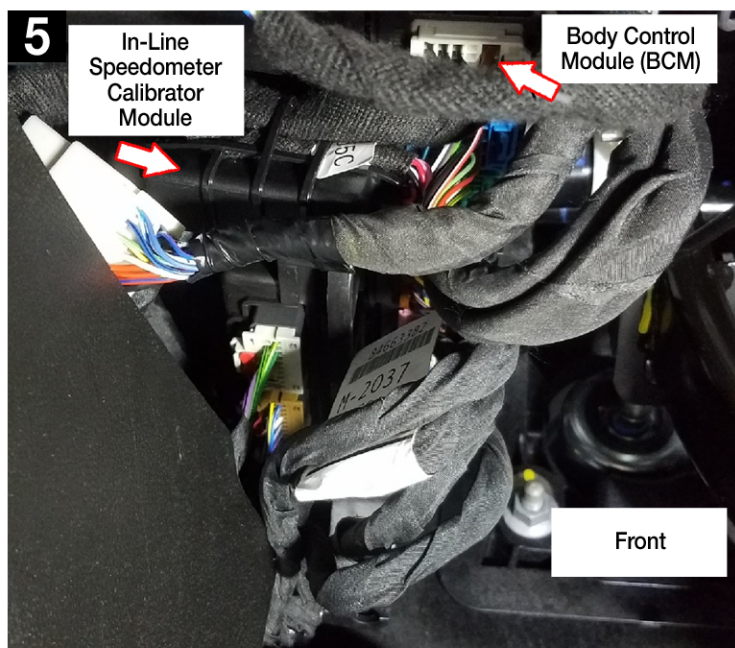

6. Start the vehicle and check for any warning signs or messages. Test drive the vehicle to ensure proper speedometer function. Your installation is now complete!



1 Year Factory Direct Limited Warranty*

Hypertech products are warranted against defects in materials or workmanship for one year from the date of purchase. Hypertech's liability under this warranty shall be limited to the prompt correction or replacement of any defective part of the product which Hypertech determines to be necessary. This limited one (1) year warranty is to the original purchaser providing all the information requested is furnished. You must retain a copy of your original sales invoice or receipt. Without proper documentation, a service fee will be applied. **Third party resellers and resold units are NOT covered under this warranty.**

* Effective date: 1.20



30-Day Risk-Free, Money Back Guarantee*

The 30-day money back guarantee applies to all Max Energy Spectrum Power Programmers, React Throttle Optimizers, Max Energy 2.0 Power Programmers, Max Energy Power Programmers, Interceptors, Speedometer Calibrators, In-Line Speedometer Calibrator Modules, and Power Chips for GM. The product **MUST** be returned to the place of purchase within thirty (30) days. All items must be received in a new, unused and ready-to-sell condition (including all original packaging, parts, and paperwork) to receive a refund, excluding any shipping and handling fees. **Units purchased used or reconditioned from a non-authorized Hypertech dealer, or units sold by 3rd-party vendors (i.e. ebay) are NOT covered under this guarantee.**

End of Instructions