



INSTALLATION GUIDE

Baffled Oil Catch Can Kit, Fits 2025+ Dodge RAM 1500 RHO
SKU: MMBCC-RAM-25

TABLE OF CONTENTS

1. RESOURCES & CONTACT INFO
2. IMPORTANT SAFETY INFORMATION
INSTALL TIME & DIFFICULTY
REQUIRED TOOLS
5. DISPOSAL & WARRANTY INFORMATION

RESOURCES & CONTACT



CALL 1.877.466.4744

CUSTOMER SERVICE HOURS: MON-FRI 9:00AM-7:00PM EST



@MISHIMOTO



@GOMISHIMOTO



MISHIMOTO



@MISHIMOTO



ENGINEERING BLOG

WWW.MISHIMOTO.COM/ENGINEERING

IMPORTANT SAFETY INFORMATION

- › Mishimoto recommends you use safety glasses and protective gloves during the installation of our products
- › Raise vehicle only on jack stands or on a vehicle lift
- › Allow vehicle to cool completely prior to attempting installation
- › Do not run the engine or drive the vehicle while overheating; serious damage can occur
- › Please dispose of any liquids properly
- › Mishimoto is not responsible for any vehicle damage or personal injury due to installation errors, misuse, or removal of Mishimoto products
- › If you need any assistance while installing our products, reach out to our Customer Service Team at 1.877.466.4744

SUPPLIED PARTS

- (1) BAFFLED CATCH CAN
- (2) STRAIGHT FITTINGS
- (1) CATCH CAN BRACKET
- (3) M4 BUTTON HEAD FLANGE BOLTS
- (4) LONG STRAIGHT HOSE WITH 45° END
- (1) SHORT STRAIGHT HOSE WITH 45° END
- (2) WORM GEAR CLAMPS
- (3) ZIP TIES

TOOLS REQUIRED

- 7MM SOCKET
- 13MM SOCKET
- 22MM WRENCH
- 2.5MM ALLEN KEY
- SILICONE GREASE (OPTIONAL)
- PLASTIC TRIM PANEL REMOVAL TOOLS (OPTIONAL)
- 1/4" OR 3/8" DRIVE RATCHET AND EXTENSIONS

INSTALL TIME: 30 MINUTES

INSTALL DIFFICULTY: 

INSTALLATION INSTRUCTIONS

1. Using a 22mm wrench, install the (2) supplied straight fittings into the catch can lid and remove the catch can from the lid.



2. Using a 2.5mm allen key, attach the catch can bracket to the catch can lid as shown, using the supplied (3) M4 bolts. Make sure to align the flat portion on the lid with the flat portion on the bracket.



3. Attach both the short and long hoses to the catch can lid utilizing the (2) worm gear clamps. The longer hose should be attached to the port labeled "OUT". Do not fully tighten the worm gear clamps yet as you may need to rotate the hoses during installation. A small amount of silicone grease can make hose installation easier.



Continued on next page


4. OPTIONAL: It is not necessary, but the radiator trim panel can be removed for additional working space by unclipping the (12) indicated pop clips.



5. Using a 13mm socket, remove the nut holding the engine cover in place. Once the nut is removed, the engine cover can be lifted off.



6. Remove the stock PCV tube. To remove the connectors, depress both sides of the locking feature and pull on the fitting.

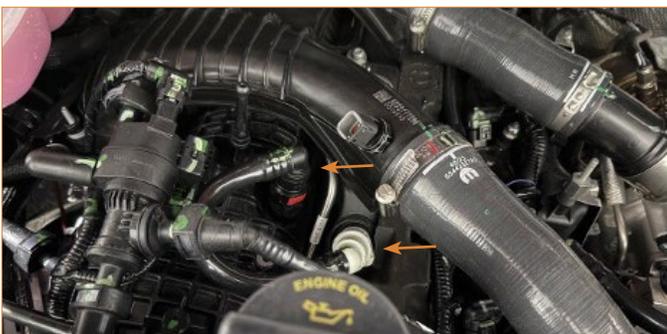

7. Remove the bolt that passes through the front frame and radiator support beam using a 13mm socket.



8. Pass the bolt through the bolt on the catch can bracket and reinstall the bolt along with the catch can.



9. Route the hoses as shown with the longer "OUT" hose going to the intake and the shorter "IN" hose going to the PCV. Be sure to route the hoses under the intake and other hoses where possible.



Continued on next page

10. The provided zip ties can be installed where desired to keep the hoses together.



11. Tighten down the (2) worm gear clamps and install the can to the catch can lid. Finally, reattach the engine cover and radiator trim panel (if removed).



Congratulations! You have completed your installation.

Continued on next page

DISPOSAL INSTRUCTIONS

- › Do not dispose of any product as unsorted municipal waste. Use separate collection facilities. Contact your local authority for information regarding the collection systems available.
- › Never improperly dispose of any coolant, oil, or other chemicals

WARRANTY INFORMATION



- › All claims must be accompanied with a picture of the Mishimoto product showing the issue for which the claim is being submitted.
- › Mishimoto asks that the customer inspect their purchased item for any damage immediately upon arrival.
- › Any product deemed dead on arrival (DOA) must be claimed within 14 business days of delivery. Claims outside of this time frame will not be covered under the Mishimoto Lifetime Warranty.
- › This warranty does not include payment and/or reimbursement of the cost of labor in connection with the removal of any product returned pursuant to the warranty policy or in connection with the installation of any replacement items provided under the warranty policy.
- › Mishimoto has the right to refuse a claim at any time.

- › When Mishimoto accepts a claim, Mishimoto retains full discretion to choose if it will: (i) repair or replace purchaser's original Mishimoto product; (ii) replace purchaser's original Mishimoto product with the most current available model; or (iii) provide the purchaser with a gift card redeemable on **Mishimoto.com** in the amount of the original purchase price of the original Mishimoto product. The provision of a replacement of a Mishimoto product is subject to availability and Mishimoto retains the right to substitute any warranty claim item with a comparable item or credit at any time.
- › If Mishimoto determines that it will provide a replacement item in connection with a claim under this warranty policy, and such item is out of stock, Mishimoto will place the customer on backorder and ship the replacement product to the purchaser once it becomes available.
- › Mishimoto is not liable for incorrect shipments in connection with a claim if a claim form is completed incorrectly, or if a model number is not included in a claim.
- › If you have a vehicle equipped with an automatic transmission, please make sure to specify this within the text box on the claim form. Mishimoto is not responsible for incorrect replacement shipments if transmission type is not indicated.



WARNING
Cancer and
Reproductive Harm
www.P65Warnings.ca.gov

- › This product can expose you to chemicals which are known to the state of California to cause cancer. For more information visit: www.p65warnings.ca.gov