



Automotive & Powersports

THE FACTS ABOUT YOUR INTAKE & AIR FILTER

ISO 5011 Tested to Make Sure You Maximize Airflow While Still Protecting Your Engine.

Part Number:	Test Date:
Description:	Test Report #:
Vehicle Applications:	

TECHNICAL BULLETIN

There is a lot of misinformation in the marketplace. S&B publishes specific test results for each of our intakes & filters as shown below, so you can make an informed decision. Remember, improving your airflow is only good if your engine is still protected. That's the S&B difference!

<p>FACT: S&B Flows _____ Better than Stock. In tests performed in our climate controlled laboratory according to the ISO5011 Test Standard, S&B's intake kit (and filter) had significantly lower restriction (better airflow) than the stock intake system. See the graph on the next page.</p>	<p>WATCH OUT: Some competitors overstate airflow. If they state that their filter will flow, let's say 1000 cfm, without stating at what restriction level, they are trying to mislead you.</p>
--	---

Description	% S&B Flowed Better than Stock (tested @ _____ cfm)	Test Conditions
S&B Intake w/ Cleanable Filter		Barometric Pressure
		Airflow Setpoint
		Relative Humidity
		Temperature
S&B Intake w/ Dry Filter		Type of Dust
		Batch #
		Dust Feed Rate (grams/minute)

<p>FACT: S&B Protects Your Engine S&B Tests at the highest rated CFM for your vehicle when determining the efficiency rate (amount of dust the filter stops), so that we can be sure that your engine will be protected</p>	<table border="1"> <thead> <tr> <th>Description</th> <th>Efficiency Rate (Tested @ _____ cfm)</th> </tr> </thead> <tbody> <tr> <td>Stock</td> <td></td> </tr> <tr> <td>S&B Intake w/ Cleanable Filter</td> <td></td> </tr> <tr> <td>S&B Intake w/ Dry Filter</td> <td></td> </tr> </tbody> </table>	Description	Efficiency Rate (Tested @ _____ cfm)	Stock		S&B Intake w/ Cleanable Filter		S&B Intake w/ Dry Filter		<p>WATCH OUT: Some Competitors Use the Same Efficiency Rates for Multiple Part Numbers Many send one filter off to a lab to be tested at a low cfm and then publish this efficiency rate for all of their part numbers</p>
Description	Efficiency Rate (Tested @ _____ cfm)									
Stock										
S&B Intake w/ Cleanable Filter										
S&B Intake w/ Dry Filter										

Air Filter Restriction Test Report

Test #: 880-1R
Sample #: 1R
Filter #:
Housing #:
Date Code: 44896

DC
12/1/2022




Test Description: STOCK RESTRICTION 2020-22 F-250/F-350 SUPER DUTY 7.3L BASELINE (75-5141)

Test Conditions

Barometric Pressure: 28.88136 in. Hg
Air Flow Type: SCFM
Number of Pleats:
Flow Direction:

Relative Humidity: 56 %
Temperature: 69 deg. F
Pleat Depth: in.

Air Flow Curve

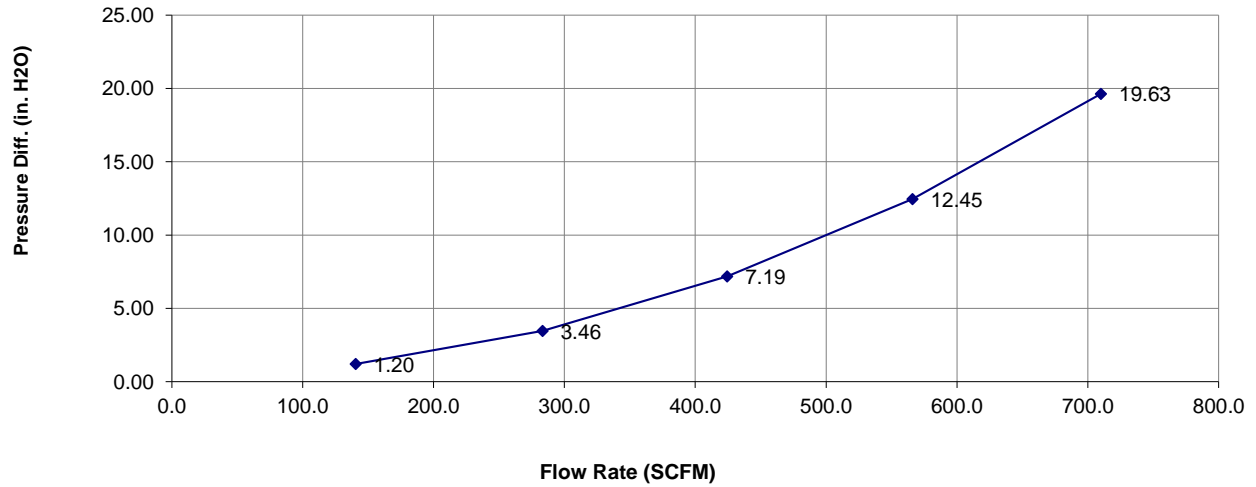

Air Flow Curve Data

<u>Flow Rate</u>	<u>Differential Pressure</u>
140	1.20
283	3.46
424	7.19
566	12.45
710	19.63

Air Filter Restriction Test Report

Test #: 880-3R
Sample #: 3R
Filter #: KF-1079
Housing #: AL1373B-00
Date Code: 44896

DC
12/1/2022
S&B
S&B




Test Description: 2020-22 F-250/F-350 SUPER DUTY 7.3L 75-5141 Restriction with secondary plug off

Test Conditions

Barometric Pressure: 28.8933 in. Hg
Air Flow Type: SCFM
Number of Pleats: 75
Flow Direction:

Relative Humidity: 54 %
Temperature: 69 deg. F
Pleat Depth: in.

Air Flow Curve

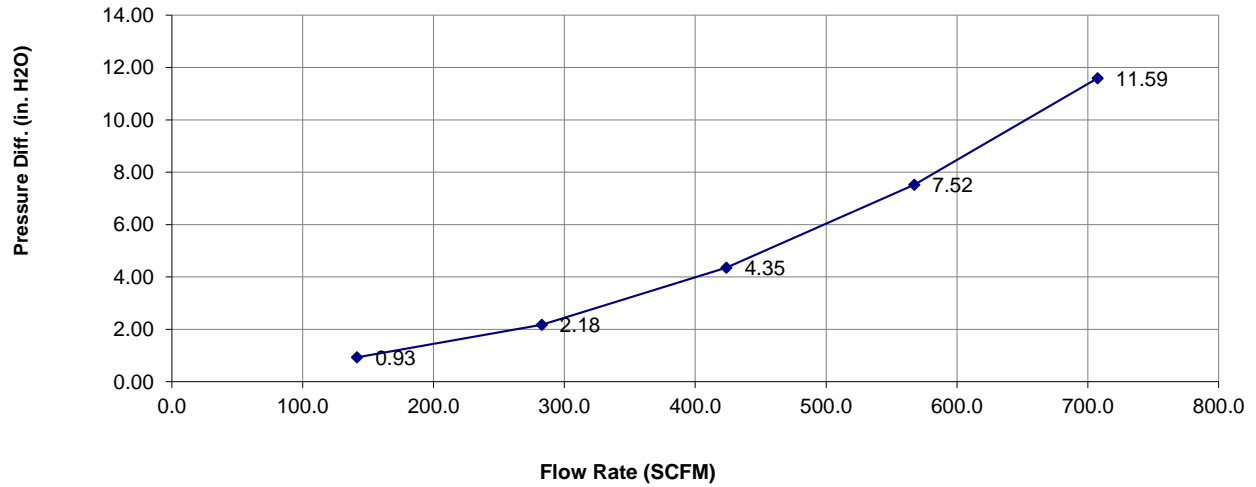

Air Flow Curve Data

<u>Flow Rate</u>	<u>Differential Pressure</u>
142	0.93
283	2.18
424	4.35
567	7.52
708	11.59

Air Filter Restriction Test Report

Test #: 880-4R
Sample #: 4R
Filter #: KF-1079D
Housing #: AL1373B-00
Date Code: 44914

DC
12/19/2022
S&B
S&B




Test Description: 2020-22 F-250/F-350 SUPER DUTY 7.3L 75-5141 Restriction with KF1079D 120 PLEATS

Test Conditions

Barometric Pressure: 29.11239 in. Hg
Air Flow Type: SCFM
Number of Pleats: 120
Flow Direction:

Relative Humidity: 56 %
Temperature: 70 deg. F
Pleat Depth: 1 in.

Air Flow Curve

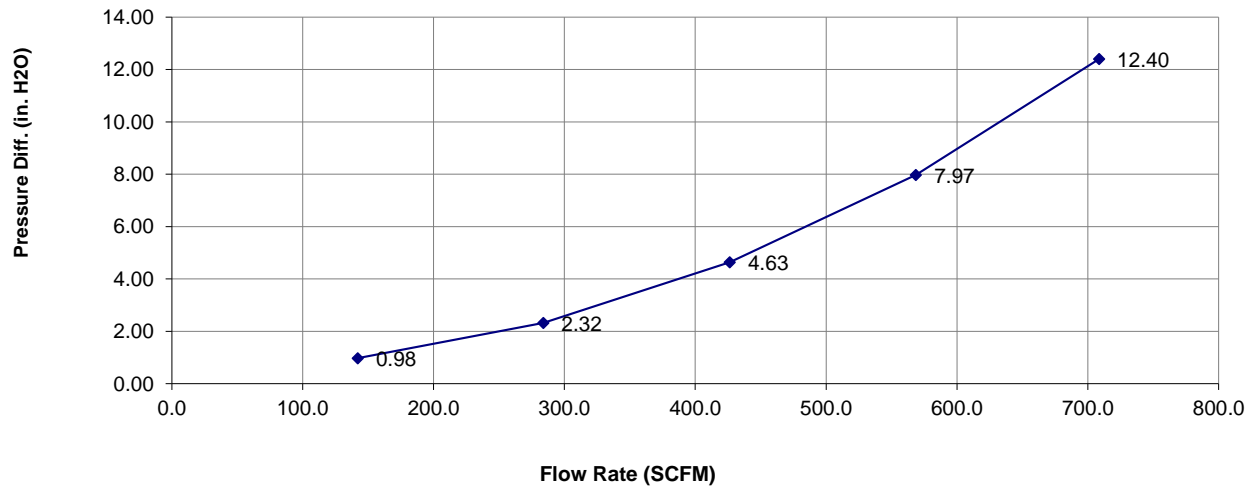

Air Flow Curve Data

<u>Flow Rate</u>	<u>Differential Pressure</u>
142	0.98
284	2.32
426	4.63
569	7.97
709	12.40







