


SS823

01-05 GM DURAMAX 6.6L 4" CAT BACK WITH HANGERS

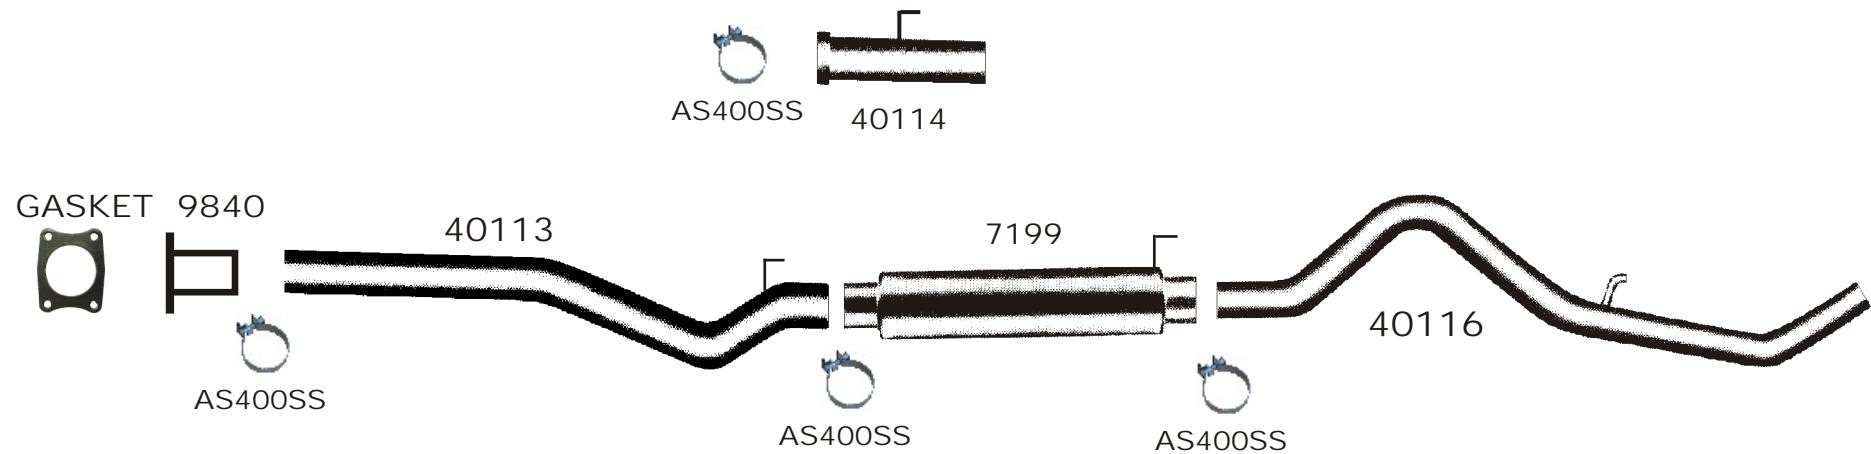

- 1-40116
- 1-7199
- 1-40113
- 1-9840
- 1-GASKET
- 4-AS400SS
- 1-40114

FLO~PRO
PERFORMANCE EXHAUST

PICKED BY: _____



**WARNING: BEFORE YOU BEGIN, VERIFY
THAT YOU RECEIVED THE RIGHT KIT &
EACH PART LISTED ON THE REVERSE PAGE**



**KIT # SS823
2001-2005 GM CAT BACK 4" SINGLE**

REMOVAL OF ORIGINAL SYSTEM

1. Unbolt flange on rear of converter.
2. Cut pipe at the front of muffler. Spray hangers with WD-40 or Loosen-All and then pry hangers from the rubber and remove the factory muffler and tail pipe.
3. Remove exhaust pipe from rear of converter. (**Note: you may have to work pipe up and down to separate flanges.**)

INSTALLATION INSTRUCTIONS

1. Install converter adapter #9840 and gasket on the back of the converter and tighten bolts.
2. Temporarily hang muffler in factory rubber hanger. You will need to support the front of the muffler so that the muffler is level with the truck frame and hanging straight with rubber hanger.
3. Now that the muffler is supported and level with truck frame, measure from rear of converter adaptor #9840 to the front of muffler, this is cut length of pipe #40113. **For Crew Cab Long Box & Dually wheel bases, pipe #40114 will be needed (Note: be sure to allow for tubing connections approx. 4", also make sure to cut from the long straight end of pipe #40113).**
4. Install pipe #40113 into rear of converter adapter #9840. (**Note: install hanger into factory rubber hanger**). Put on the clamp. Smug the clamp down so it will hold pipe but the pipe can still be moved with some effort.
5. Install muffler on factory rubber hanger, slip inlet over rear of pipe #40113, place clamp on inlet, snug the clamp down so it will hold muffler but muffler can still be moved with some effort.
6. Install tail pipe #40116 in outlet of muffler and use factory hanger.
7. Install clamp on tail pipe. Snug the clamp down so it will hold the pipe but the pipe can still be moved with some effort.
8. **Check for clearances, i.e., brake lines may have to be moved, or e-brake cables as well as axle vent tube.** Also check to make sure that the exit of tail pipe is level with truck.
9. Starting with clamp on rear of adapter #9840, tighten all clamps working your way to rear of truck.

**Note: a mig weld should be applied to the clamped connections of pipe for added security.
DO NOT WELD CLAMPS.**

www.flopro.com

Technical Support: 1 800 762 4286 or email, techsupport@flopro.com